



SITE PLAN

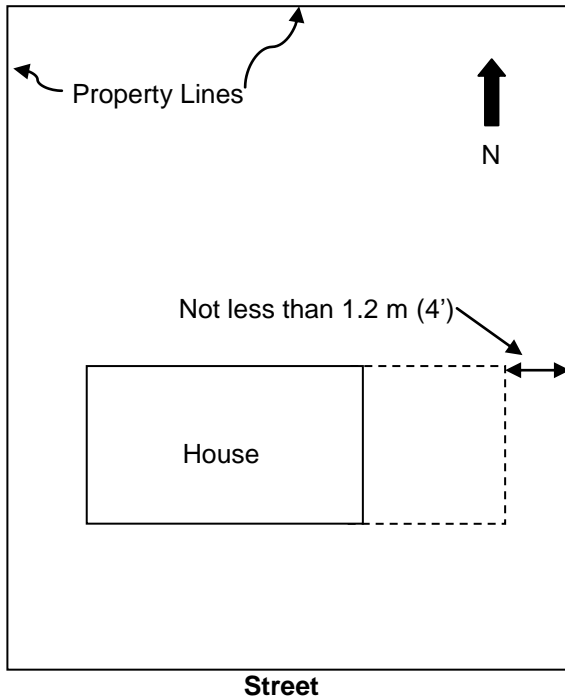

FOUNDATION

Foundation wall & spread footing **OR** Grade beam & piles

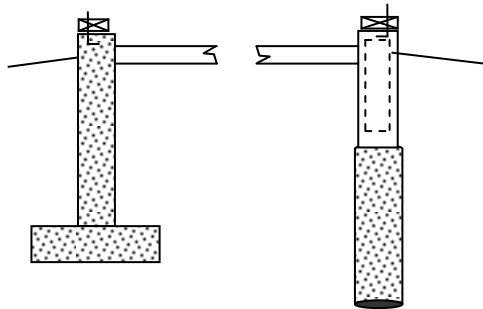

Complete the following:

Size of the garage: ___ x ___, _____ ft²

Width of the overhead door: _____'

Size of the overhead door lintel (header):

___ plies ___ x ___

Access door(s) to existing house

Weather stripped

Self-closer

Deadbolt lock

No openable windows

(in door or common wall with house)

ROOF

Asphalt shingles Metal Roofing

Other: _____

Roof Sheathing: OSB Plywood

Other: _____

Thickness of sheathing: 3/8" 7/16"

Other: _____

Roof trusses: Pre-engineered

Other: _____

Spacing of trusses: 16" o.c. 24" o.c.

Other: _____

Length of truss including overhang: _____'

Roof overhang: _____"

FOUNDATION

Foundation **must be** below the level of frost or not less than 1.2 m (4') (if a wall and spread footing is used) **or** piles must be not less than 10 - 12' in depth.

Grade Beam

Size of grade beam: _____"(h) x _____"(w)

Piles: diameter _____", depth _____"

Void form provided:

Rebar reinforcing provided:

In grade beam:

In piles:

Foundation wall & spread footing

Foundation wall height: _____"

Wall thickness: _____"


Spread footing: (width) _____" X (thickness) _____"

Rebar reinforcing:

ATTACHED GARAGE WORKSHEET

Permit Name: _____

Civic Address: _____

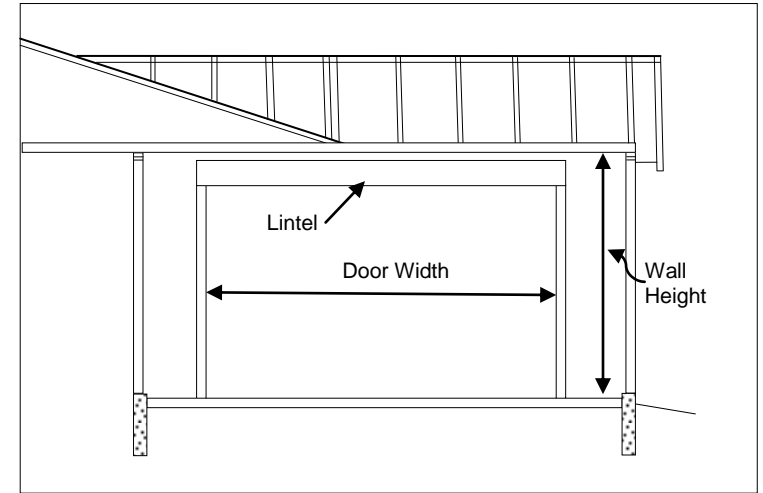

WALLS:

Exterior siding: Vinyl Stucco Hardboard Metal

Other: _____

Air barrier: House wrap Building paper

Wall sheathing: OSB Plywood Other: _____

Thickness of sheathing: 3/8" 1/2" Other: _____

Wall framing: 2 x _____ 16" o.c. 24" o.c.

Height of exterior walls: _____"

Lintel (header) size and number of plies for:

access door: ___ plies ___ x _____,

window: ___ plies ___ x _____,

Wall anchorage: 3/8" 1/2" bolts Other: _____

Spacing of anchors: _____" o.c.



Meridan

Inspections Ltd